



LUFFING TL770-50 (QTD770tm)

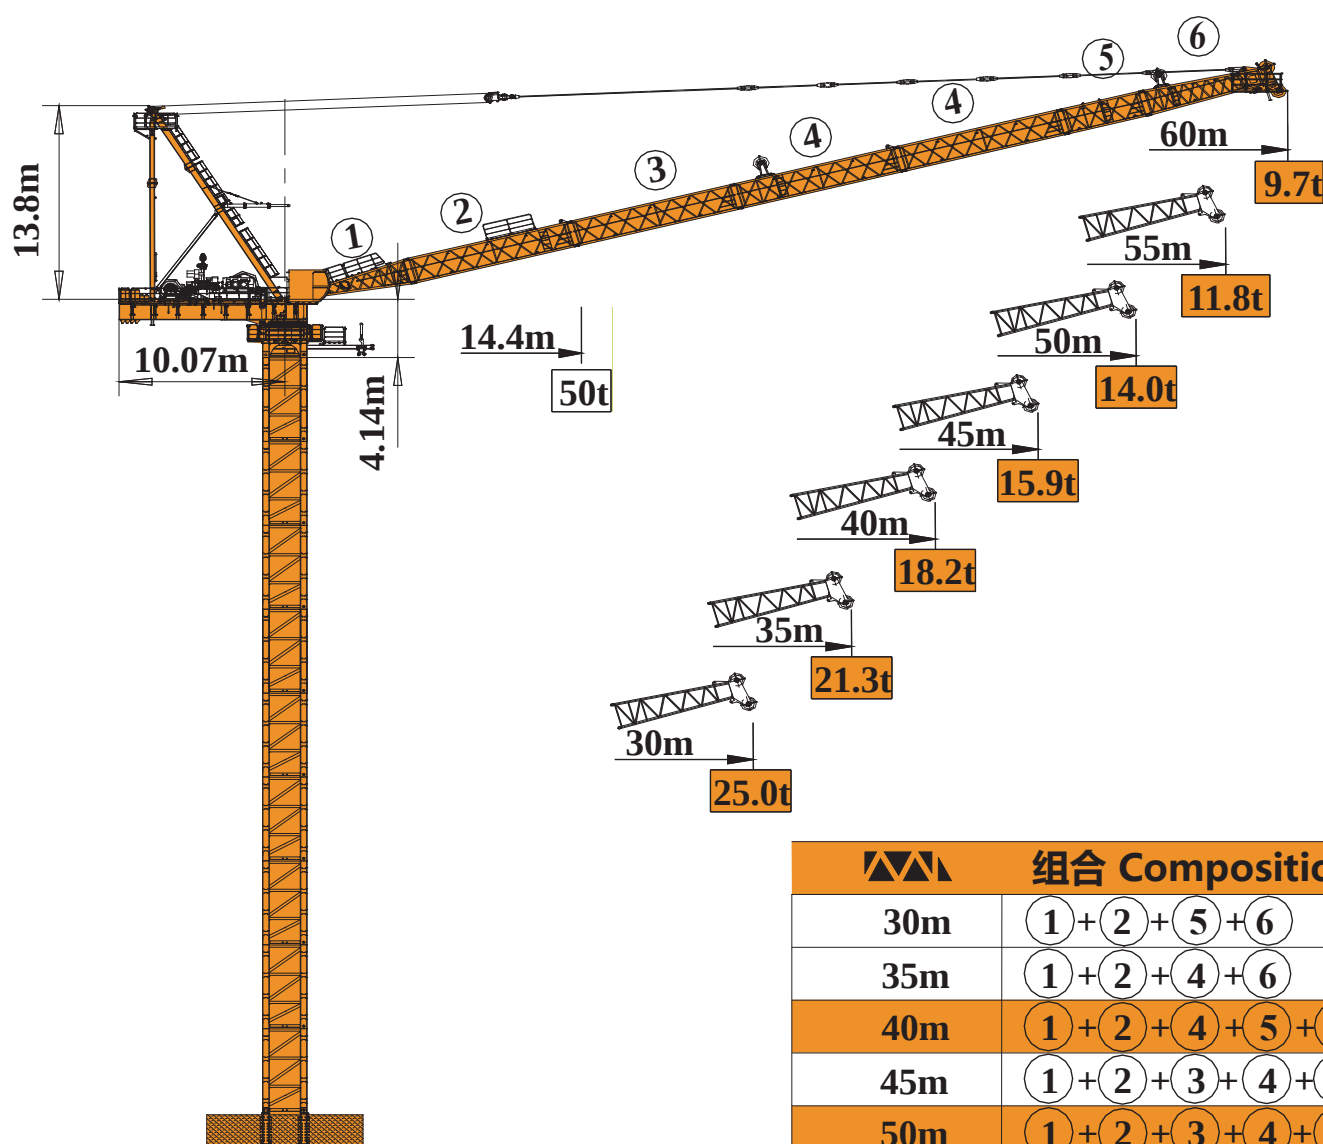


组合 Composition	
30m	①+②+⑤+⑥
35m	①+②+④+⑥
40m	①+②+④+⑤+⑥
45m	①+②+③+④+⑥
50m	①+②+③+④+⑤+⑥
55m	①+②+③+④+④+⑥

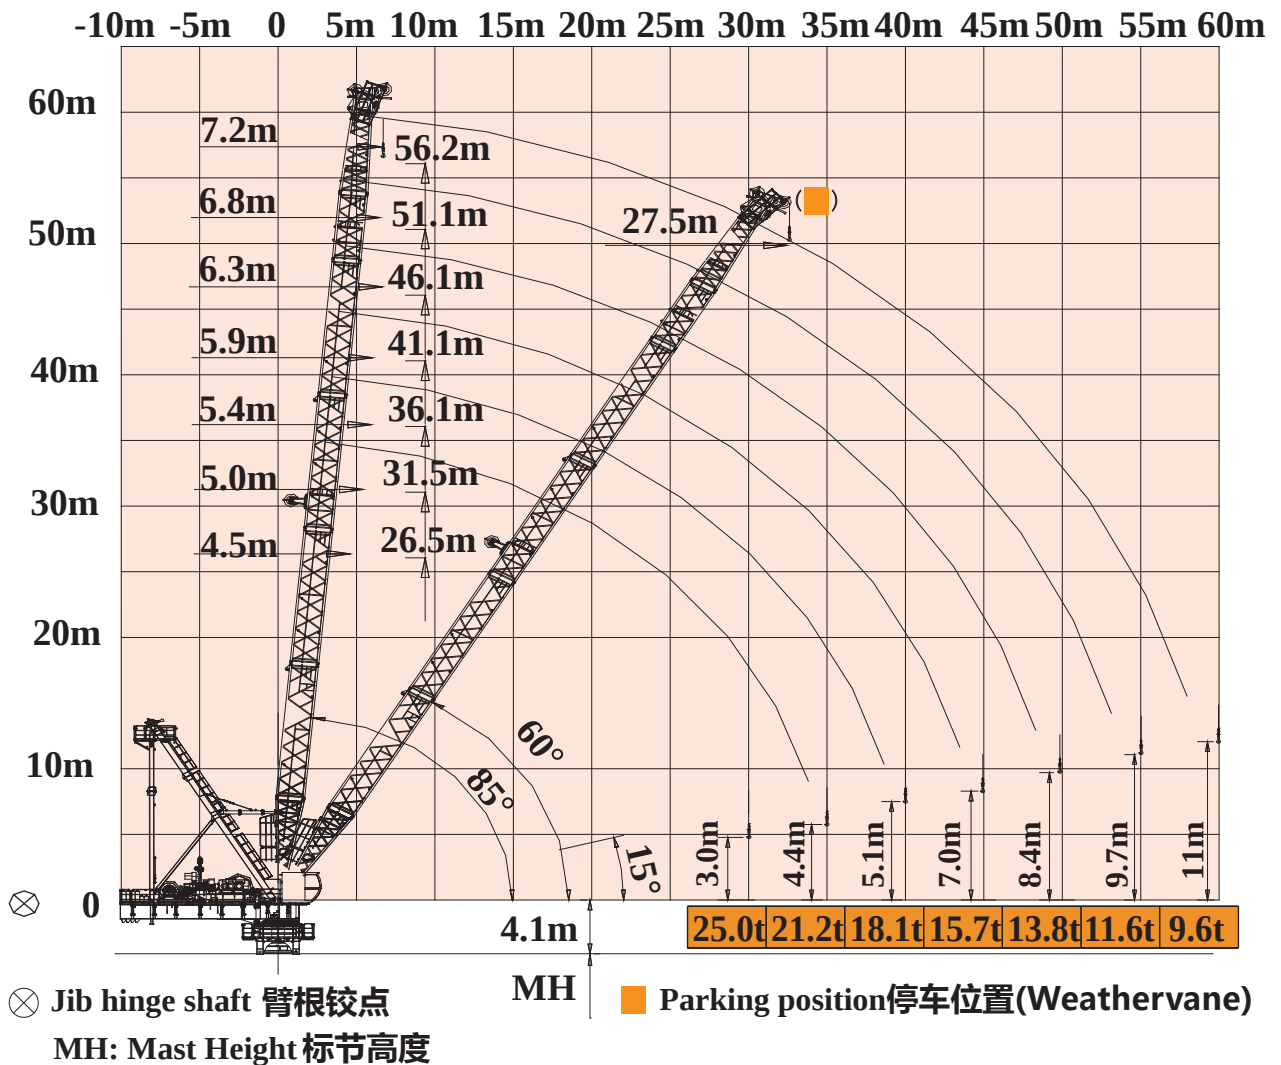

载荷特性 | Load Diagrams

Radius		Max Load		m/t									
m	rope	t	m	15	20	25	30	35	40	45	50	55	60
60		25.0	23.7		25.00	23.85	19.90	17.02	14.87	12.95	11.83	10.89	9.70
55		25.0	25.3			25.00	21.96	18.24	16.44	14.58	13.08	11.80	
50		25.0	30.0				25.00	21.25	18.25	15.92	14.00		
		50.0	15.5	50.00	38.00	29.70	24.22	20.29	17.33	15.05	13.20		
45		25.0	30.3				25.00	21.25	18.26	15.90			
		50.0	15.6	50.00	38.15	29.77	24.28	20.35	17.39	15.10			
40		25.0	30.5				25.00	21.30	18.28				
		50.0	15.7	50.00	38.26	29.84	24.35	20.45	17.50				
35		25.0	30.7				25.00	21.38					
		50.0	15.8	50.00	38.45	29.95	24.49	20.60					
30		25.0	30.0				25.00						
		50.0	15.8	50.00	38.60	30.10	24.60						

塔身截面 | Mast | 3.14*3.05*5.7m / 2.714*2.705*5.98m / 2.32*2.34*6m

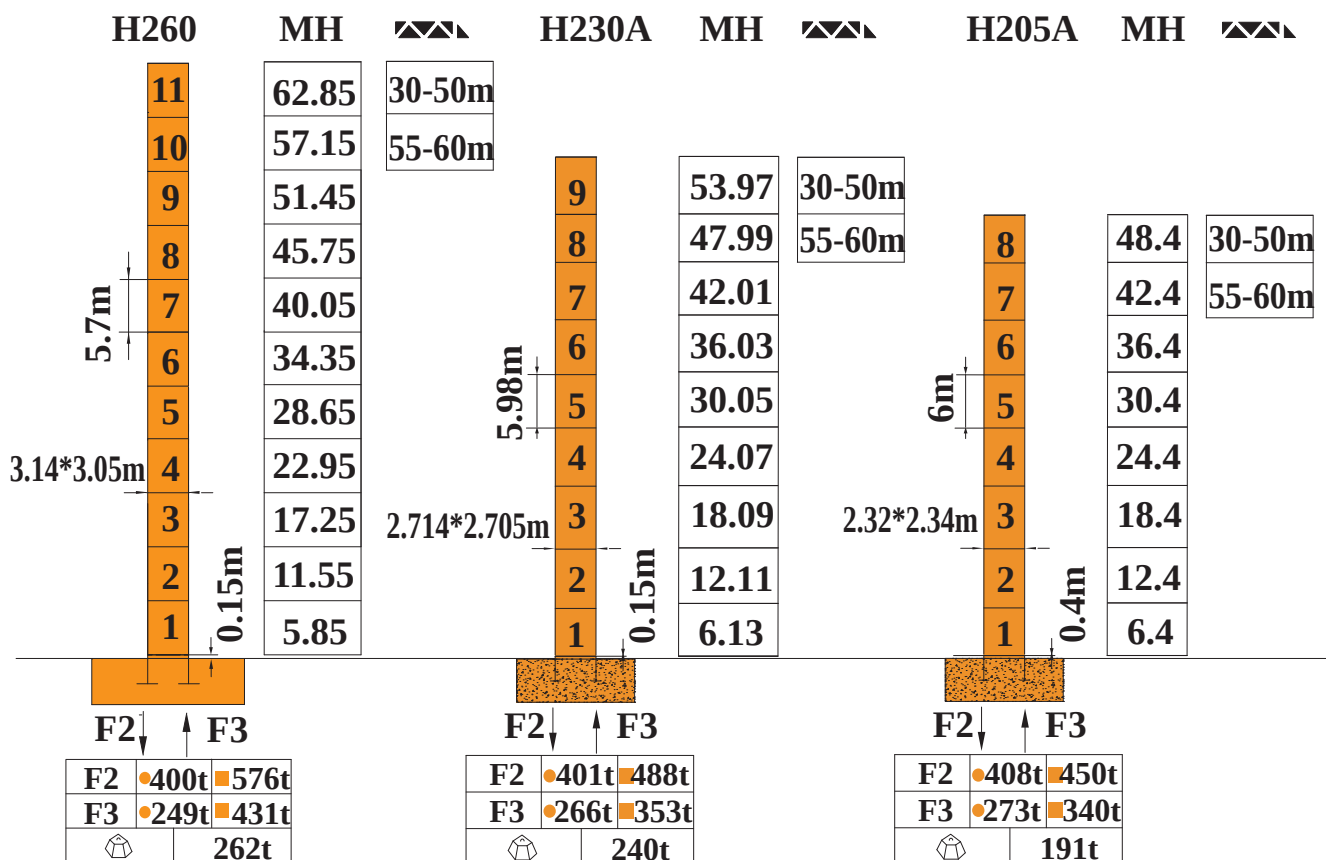


F 反力 Reactions

■ 非工作状态 out of service
● 工作状态 in service

自重 self-load 不带载荷及配重, 最大臂长及标准高度时的自重 Without load and ballast with longest jib and self-weight in standard height.

内爬塔机 | Internal Climbing

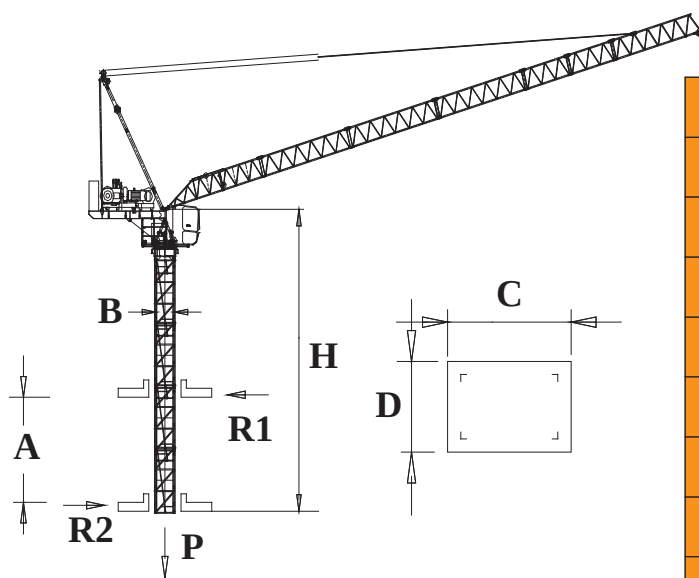

H: Height to Jib hinge shaft 到吊臂根铰点高度

H230		H205A	
B	2.71m	B	2.34m
C	3.72m	C	3.32m
D	3.52m	D	2.75m
H1		H1	
A		A	
R1		R1	
R2		R2	
P		P	

